

SAFETY WARNINGS

STUDY, UNDERSTAND, AND FOLLOW ALL INSTRUCTIONS BEFORE USING LEVELING BLOCKS.

FAILURE TO HEED THESE MARKINGS MAY RESULT IN PERSONAL INJURY OR DEATH.

NEVER GO BENEATH VEHICLE WHILE IN USE.


ASSEMBLY INSTRUCTIONS

- 1) Position RV on most level parking area, set parking brake, and turn vehicle engine off.
- 2) Determine which wheels need to be elevated and the height required.
- 3) Remove debris to create a smooth area for the leveling blocks.
- 4) Remove leveling blocks from the nylon bag.
- 5) Stack the leveling blocks to the required leveling height.* Blocks should only be arranged using one of the three methods illustrated below.
- 6) Place the stack of leveling blocks either in front or behind wheel(s) to be elevated.
- 7) Slowly idle the vehicle onto the leveling blocks, set the parking brake, and turn vehicle engine off.


NOTE: If using leveling blocks under jacks, or stabilizers, a minimum of two (2) blocks must be used on a level and solid surface.

*Leveling blocks should never exceed 4.5" in height.


10 BLOCKS

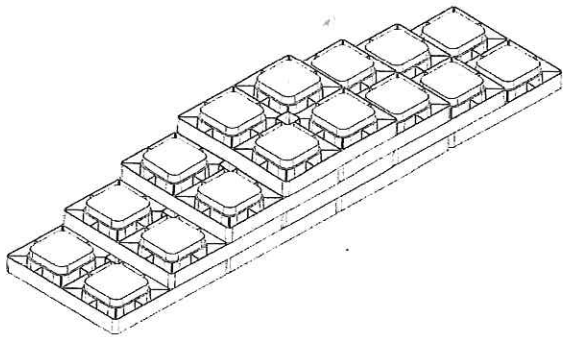

6 BLOCKS

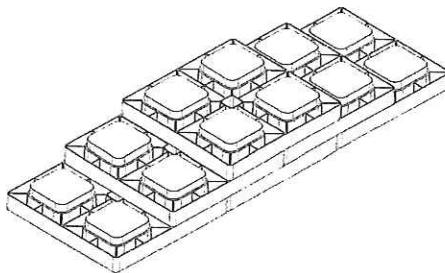

3 BLOCKS

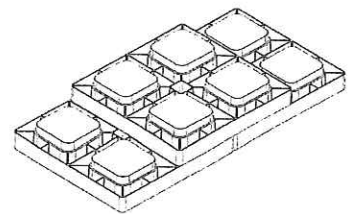

LIMITED WARRANTY: Camco warrants this product to be free from defects in material and workmanship under normal use and service conditions for 12 months from the date of first purchase. Camco's liability is limited solely to the replacement of any defective product returned to us. To the extent allowable by law, Camco makes no other warranty, either expressed or implied, nor assumes any liability for incidental or consequential damages resulting from the use of this product or for breach of warranty of merchantability or fitness for a particular purpose. Submit warranty claims to Camco Manufacturing, 121 Landmark Drive, Greensboro, NC 27409.